

V-Lined Glass Thermometer

Fig. 2103

Specification

Thread comply with ISO228/1

Testing standards comply with JJG130

Technical data

Normal size: 110 x 30mm, 150 x 30mm, 200 x 30mm

Pocket length: 20,40,63,80,100,150,200,250mm

Connection: BSP 1/2"

Form: Straight form, 90° angled, 135° angled.

Range: -30 ~ +50°C, -30 ~ +70°C, 0 ~ 60°C, 0 ~ 100°C,
0 ~ 120°C, 0 ~ 160°C, 0 ~ 200°C, 0 ~ 300°C,
0 ~ 400°C, 0 ~ 500°C, 0 ~ 600°C

Casing: Aluminum, V-lined, completely polished,
gold colored anodizing.
Brass as standard for range up to +250°C,
For ranges over +250°C, chrome plated steel,
304 or 316 stainless steel available
Dual scale °C/°F .


Capillary fluid: For standard types from -40~+200°C,
blue liquid;
For range above +200°C, mercury

Diameter: 10mm as standard, 12mm for option

Accuracy: ±1°C

Options: NPT 3/4", 3/8", M20x1.5

Schematic

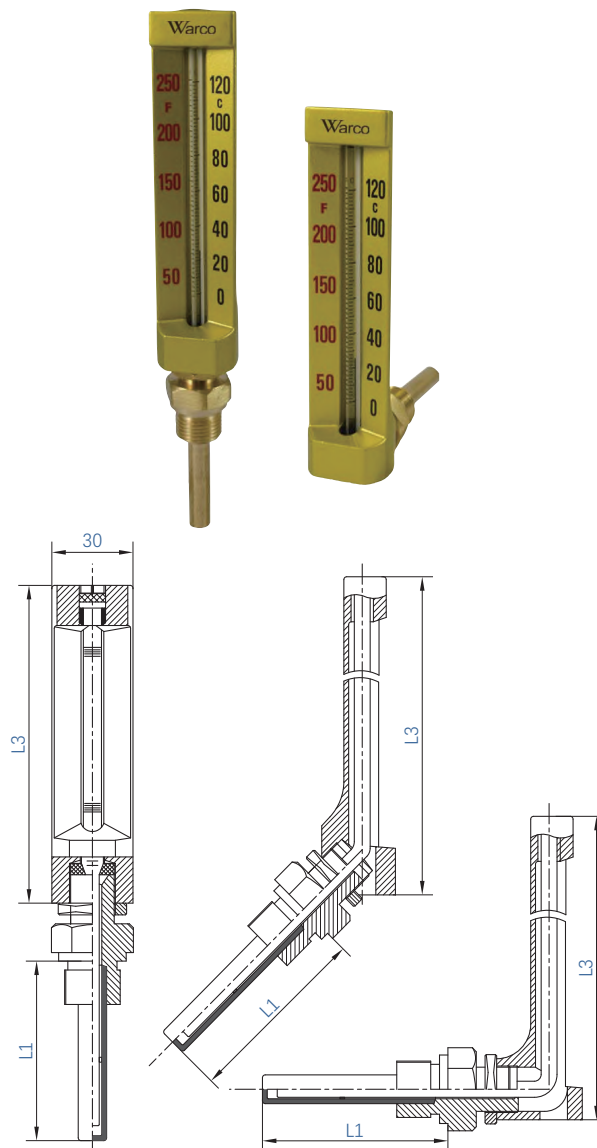

L3: 110 / 150 / 200 mm

L1: 20 / 40 / 63 / 80 / 100 / 150 / 200 / 250 mm

WARCO reserves the right to change dimensions without notice.