

Air Vent SS304-Threaded

Fig. 7915

Standard

Connection: BS21(ISO7)

Testing: ISO 5208

Technical Data

Working Pressure: $0.2\text{bar} \leq P \leq 12\text{bar}$

Dimensions: DN10~DN40

Testing pressure: Shell: 16bar


Seal: 11bar

Temperature: $-20^{\circ}\text{C} \sim 110^{\circ}\text{C}$ EPDM

Material

Part	Material	Description
Cap	GFR Nylon	-
Bonnet	GFR Nylon	-
Cap	Stainless Steel	304
O-ring	NBR	-
Stem	Stainless Steel	304
Body	Stainless Steel	304
Float	PE-HD	-
O-ring	NBR	-
Nut	Stainless Steel	304
Thread Adaptor	Stainless Steel	304
Spring	Stainless Steel	304
Mesh	Stainless Steel	304
O-ring	NBR	-

Schematic

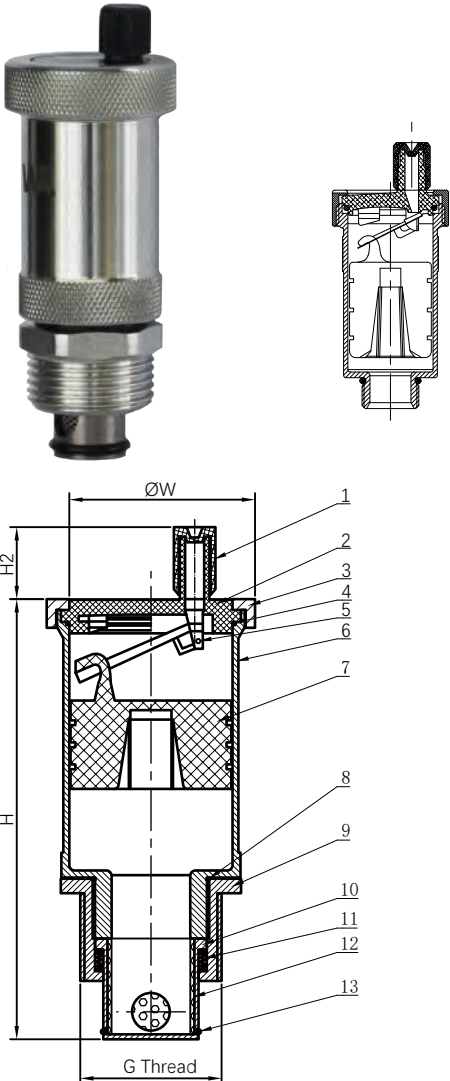

Dimensions

DN	mm	10	15	20	25	32	40
	inch	3/8	1/2	3/4	1	1-1/4	1-1/2
H		83	83	83	83	83	83
H2		17	17	17	17	17	17
W		34	34	34	34	34	34
G		G 3/8"	G 1/2"	G 3/4"	G 1"	G 1-1/4"	G 1-1/2"

WARCO reserves the right to change dimensions without notice.