


## Linear Actuator

Fig. ESM11P/31P


### Technical data

Control: Temp. differential  
 Supply voltage: 90~230VAC; 24VAC/DC  
 Operation time: 25s~99s  
 Stroke: 5mm  
 Force: 200N  
 Enclosure protection: IP54  
 Accuracy: 0.1°C  
 Display range: 0°C ~ 99.9°C  
 Ambient Temperature: -20°C ~ +50°C

### Schema

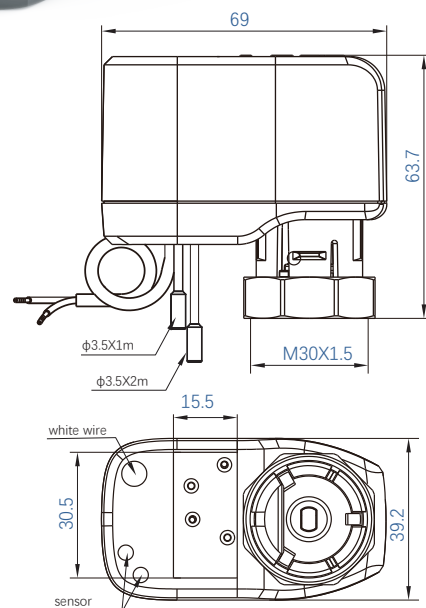

### Wiring and display

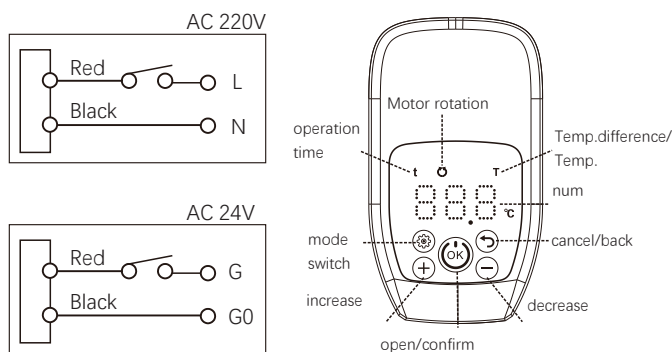

Matching Valve: Fig. 8940/8510 series

### Notice

1. Do not use this Actuator in applications that are outside its designated application scope.
2. Actuator must be installed by professional personnel and comply with laws and regulations issued by authoritative authorities during assembly.
3. Users should not open the shell of this Actuator without permission. This device does not contain any parts that can be repaired or replaced.
4. Do not remove the cable from the device.
5. This equipment contains electronic components, shall not be treated as ordinary household garbage, must be dealt with in accordance with the relevant laws and regulations of the location.