

## Threaded Stainless Steel Flexible Hose

Fig. W290

### Specification

Design in accordance with GB/T14525

Thread comply with ISO228/1

Testing standards comply with GB/T13927,ISO5208

### Technical data

**Working Pressure:** 16bar

**Dimensions:** DN15~DN32

**Working Temperature:** -10°C~120°C

**Applicable Medium:** Cold and hot water, refrigerant,  
glycol, hydrazine, etc

**Connection:** Rotatable male threads on both ends(BSPT)

### Optional


Customized according to customer's demand.

High-pressure-resistant products of more than 2Mpa  
can be made.

### Schematic



(Rotatable male threads on both ends)

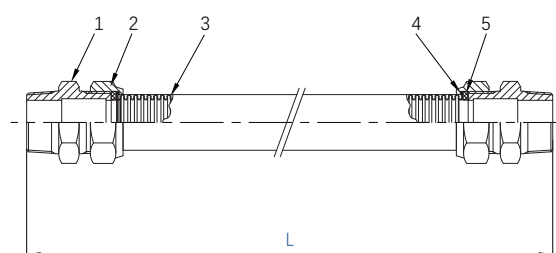

### Material Specifications

Part Name	Materials	Specification
Male Fittings	Brass	HPb58-2
Nut Fittings	Brass	HPb58-2
Bellow	Stainless Steel	SUS304、SUS316
Collar	Carbon Steel	-
Gaskets	Silicone Rubber	-

### Dimensions

DN	mm	15	20	25	32
	inch	1/2	3/4	1	1-1/4
L		300mm (Factory default lengths, other lengths available)			

WARCO reserves the right to change dimensions without notice.