

Bimetal Thermometer (Radial connection)

Fig. 2322

Specification

Thread comply with ISO228/1
 Testing standards comply with JB/T 8803

Technical data

Normal size: 80,100,150mm
Pocket length: 63,100,150,225,305,380,460,610mm
Connection: BSP 1/2"


Range: -20 ~ +60°C, -40 ~ +50°C, -40 ~ +70°C,
 -20 ~ +90°C, 20 ~ +120°C, 10 ~ +150°C,
 10 ~ +200 °C

Temperature sensor: Bimetal coil

Accuracy: 1.6

Options: CI 1.0
 Glycerol filling
 Silicon oil filling
 316 Stainless Steel bulb and pocket

Schematic

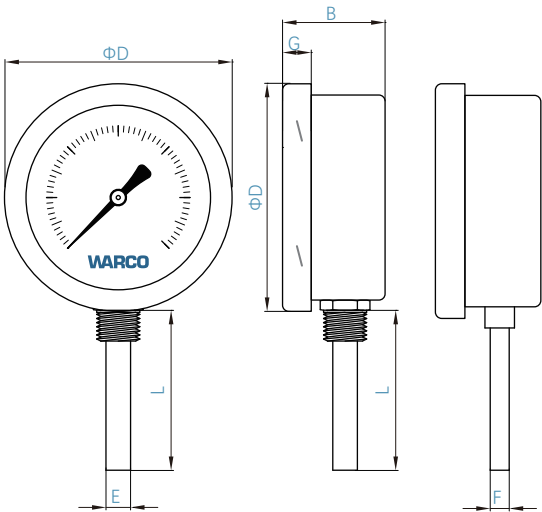

Material Specifications

Part Name	Materials	Specification
Casing	Stainless Steel	Polished SS304
Bezel ring	Stainless Steel	Polished SS304
Window	Instrument Glass	-
Bulb	Stainless Steel	SS304
Pocket	Stainless Steel	SS304

Dimensions

DN		ΦD	B	G	E	F	L
mm	inch						
80	3"	84	46.5	11	12	8	63 ~ 610
100	4"	111	50.5	16.5	12	8	63 ~ 610
150	6"	160	50.5	18	12	8	63 ~ 610

WARCO reserves the right to change dimensions without notice.